


# Chapter 30

## Induction and Inductance



## 30.2: First Experiment:

The magnet's motion creates a current in the loop.

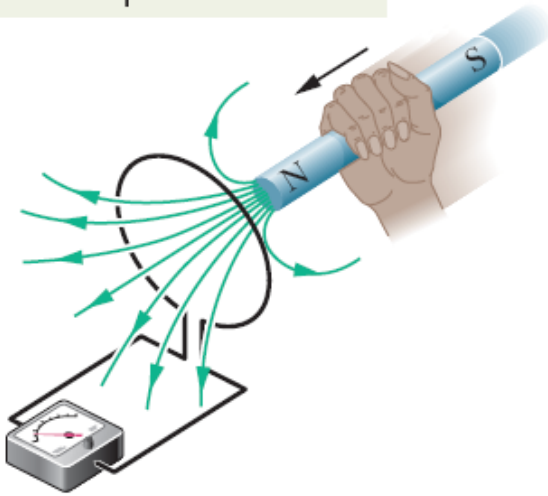

**Fig. 30-1** An ammeter registers a current in the wire loop when the magnet is moving with respect to the loop.

1. A current appears only if there is relative motion between the loop and the magnet (one must move relative to the other); the current disappears when the relative motion between them ceases.

2. Faster motion produces a greater current.


3. If moving the magnet's north pole toward the loop causes, say, clockwise current, then moving the north pole away causes counterclockwise current.

Moving the south pole toward or away from the loop also causes currents, but in the reversed directions.

The current thus produced in the loop is called *induced current*.


## 30.2: Second Experiment:


For this experiment we use the apparatus of Fig. 30-2, with the two conducting loops close to each other but not touching. If we close switch  $S$ , to turn on a current in the right-hand loop, the meter suddenly and briefly registers a current—an induced current—in the left-hand loop. If we then open the switch, another sudden and brief induced current appears in the left hand loop, but in the opposite direction. We get an induced current (and thus an induced emf) only when the current in the right-hand loop is changing (either turning on or turning off) and not when it is constant (even if it is large).

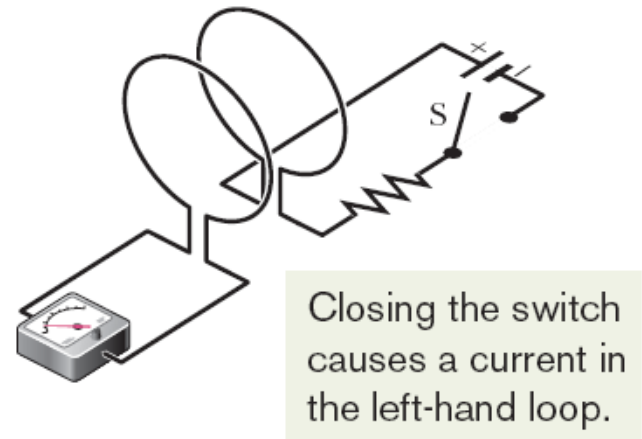

**Fig. 30-2** An ammeter registers a current in the left-hand wire loop just as switch  $S$  is closed (to turn on the current in the right-hand wire loop) or opened (to turn off the current in the right-hand loop). No motion of the coils is involved.

### 30.3: Faraday's Law of Induction:

 An emf is induced in the loop at the left in Figs. 30-1 and 30-2 when the number of magnetic field lines that pass through the loop is changing.

 The magnitude of the emf  $\mathcal{E}$  induced in a conducting loop is equal to the rate at which the magnetic flux  $\Phi_B$  through that loop changes with time.

Suppose a loop enclosing an area  $A$  is placed in a magnetic field  $\mathbf{B}$ . Then the *magnetic flux through the loop* is

$$\Phi_B = \int \vec{B} \cdot d\vec{A} \quad (\text{magnetic flux through area } A).$$

If the loop lies in a plane and the magnetic field is perpendicular to the plane of the loop, and if the magnetic field is constant, then

$$\Phi_B = BA \quad (\vec{B} \perp \text{area } A, \vec{B} \text{ uniform}).$$

The SI unit for magnetic flux is the tesla–square meter, which is called the *weber* (abbreviated *Wb*):

$$1 \text{ weber} = 1 \text{ Wb} = 1 \text{ T} \cdot \text{m}^2.$$

$$\mathcal{E} = -\frac{d\Phi_B}{dt} \quad (\text{Faraday's law}),$$

### 30.3: Faraday's Law of Induction:

If we change the magnetic flux through a coil of  $N$  turns, an induced emf appears in every turn and the total emf induced in the coil is the sum of these individual induced emfs. If the coil is tightly wound (*closely packed*), so that the same magnetic flux  $\Phi_B$  passes through all the turns, the total emf induced in the coil is


$$\mathcal{E} = -N \frac{d\Phi_B}{dt} \quad (\text{coil of } N \text{ turns}). \quad (30-5)$$

Here are the general means by which we can change the magnetic flux through a coil:

1. Change the magnitude  $B$  of the magnetic field within the coil.
2. Change either the total area of the coil or the portion of that area that lies within the magnetic field (for example, by expanding the coil or sliding it into or out of the field).
3. Change the angle between the direction of the magnetic field  $\vec{B}$  and the plane of the coil (for example, by rotating the coil so that field  $\vec{B}$  is first perpendicular to the plane of the coil and then is along that plane).

## Example, Induced emf in a coil due to a solenoid:

The long solenoid  $S$  shown (in cross section) in Fig. 30-3 has 220 turns/cm and carries a current  $i = 1.5$  A; its diameter  $D$  is 3.2 cm. At its center we place a 130-turn closely packed coil  $C$  of diameter  $d = 2.1$  cm. The current in the solenoid is reduced to zero at a steady rate in 25 ms. What is the magnitude of the emf that is induced in coil  $C$  while the current in the solenoid is changing?

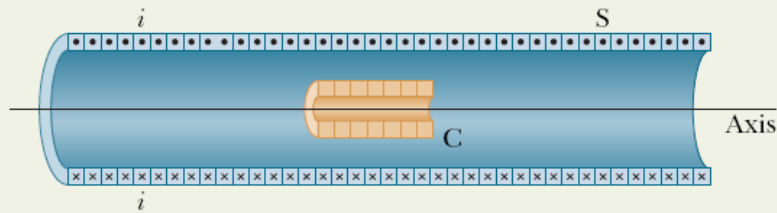

**Fig. 30-3** A coil  $C$  is located inside a solenoid  $S$ , which carries current  $i$ .

- The flux through each turn of coil  $C$  depends on the area  $A$  and orientation of that turn in the solenoid's magnetic field  $\vec{B}$ . Because  $\vec{B}$  is uniform and directed perpendicular to area  $A$ , the flux is given by Eq. 30-2 ( $\Phi_B = BA$ ).
- The magnitude  $B$  of the magnetic field in the interior of a solenoid depends on the solenoid's current  $i$  and its number  $n$  of turns per unit length, according to Eq. 29-23 ( $B = \mu_0 in$ ).

**Calculations:** Because coil  $C$  consists of more than one turn, we apply Faraday's law in the form of Eq. 30-5 ( $\mathcal{E} = -N d\Phi_B/dt$ ), where the number of turns  $N$  is 130 and  $d\Phi_B/dt$  is the rate at which the flux changes.

Because the current in the solenoid decreases at a steady rate, flux  $\Phi_B$  also decreases at a steady rate, and so we can write  $d\Phi_B/dt$  as  $\Delta\Phi_B/\Delta t$ . Then, to evaluate  $\Delta\Phi_B$ , we need the final and initial flux values. The final flux  $\Phi_{B,f}$  is zero

### KEY IDEAS

- Because it is located in the interior of the solenoid, coil  $C$  lies within the magnetic field produced by current  $i$  in the solenoid; thus, there is a magnetic flux  $\Phi_B$  through coil  $C$ .
  - Because current  $i$  decreases, flux  $\Phi_B$  also decreases.
  - As  $\Phi_B$  decreases, emf  $\mathcal{E}$  is induced in coil  $C$ .
- because the final current in the solenoid is zero. To find the initial flux  $\Phi_{B,i}$ , we note that area  $A$  is  $\frac{1}{4}\pi d^2$  ( $= 3.464 \times 10^{-4} \text{ m}^2$ ) and the number  $n$  is 220 turns/cm, or 22 000 turns/m. Substituting Eq. 29-23 into Eq. 30-2 then leads to

$$\begin{aligned}\Phi_{B,i} &= BA = (\mu_0 in)A \\ &= (4\pi \times 10^{-7} \text{ T}\cdot\text{m/A})(1.5 \text{ A})(22\,000 \text{ turns/m}) \\ &\quad \times (3.464 \times 10^{-4} \text{ m}^2) \\ &= 1.44 \times 10^{-5} \text{ Wb}.\end{aligned}$$

Now we can write


$$\begin{aligned}\frac{d\Phi_B}{dt} &= \frac{\Delta\Phi_B}{\Delta t} = \frac{\Phi_{B,f} - \Phi_{B,i}}{\Delta t} \\ &= \frac{(0 - 1.44 \times 10^{-5} \text{ Wb})}{25 \times 10^{-3} \text{ s}} \\ &= -5.76 \times 10^{-4} \text{ Wb/s} = -5.76 \times 10^{-4} \text{ V}.\end{aligned}$$

We are interested only in magnitudes; so we ignore the minus signs here and in Eq. 30-5, writing

$$\begin{aligned}\mathcal{E} &= N \frac{d\Phi_B}{dt} = (130 \text{ turns})(5.76 \times 10^{-4} \text{ V}) \\ &= 7.5 \times 10^{-2} \text{ V} = 75 \text{ mV}.\end{aligned}\quad \text{(Answer)}$$

## 30.4: Lenz's Law:

An induced current has a direction such that the magnetic field due to *the current* opposes the change in the magnetic flux that induces the current.

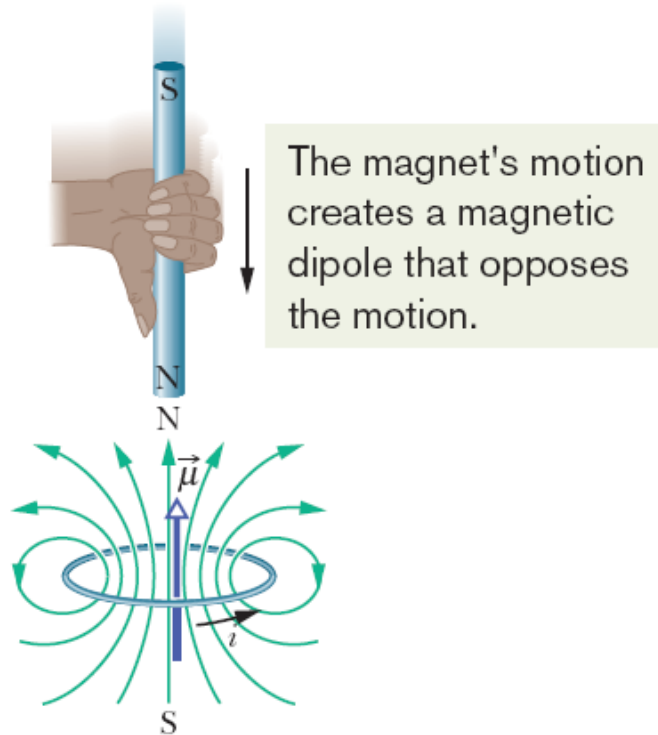


**Fig. 30-4** Lenz's law at work. As the magnet is moved toward the loop, a current is induced in the loop. The current produces its own magnetic field, with magnetic dipole moment  $\vec{\mu}$  oriented so as to oppose the motion of the magnet. Thus, the induced current must be counterclockwise as shown.

**Opposition to Pole Movement.** The approach of the magnet's north pole in Fig. 30-4 increases the magnetic flux through the loop, inducing a current in the loop. To oppose the magnetic flux increase being caused by the approaching magnet, the loop's north pole (and the magnetic moment  $\mu$ ) must face toward the approaching north pole so as to repel it. The current induced in the loop must be counterclockwise in Fig. 30-4. If we next pull the magnet away from the loop, a current will again be induced in the loop. Now, the loop will have a south pole facing the retreating north pole of the magnet, so as to oppose the retreat. Thus, the induced current will be clockwise.



# 30.4: Lenz's Law:

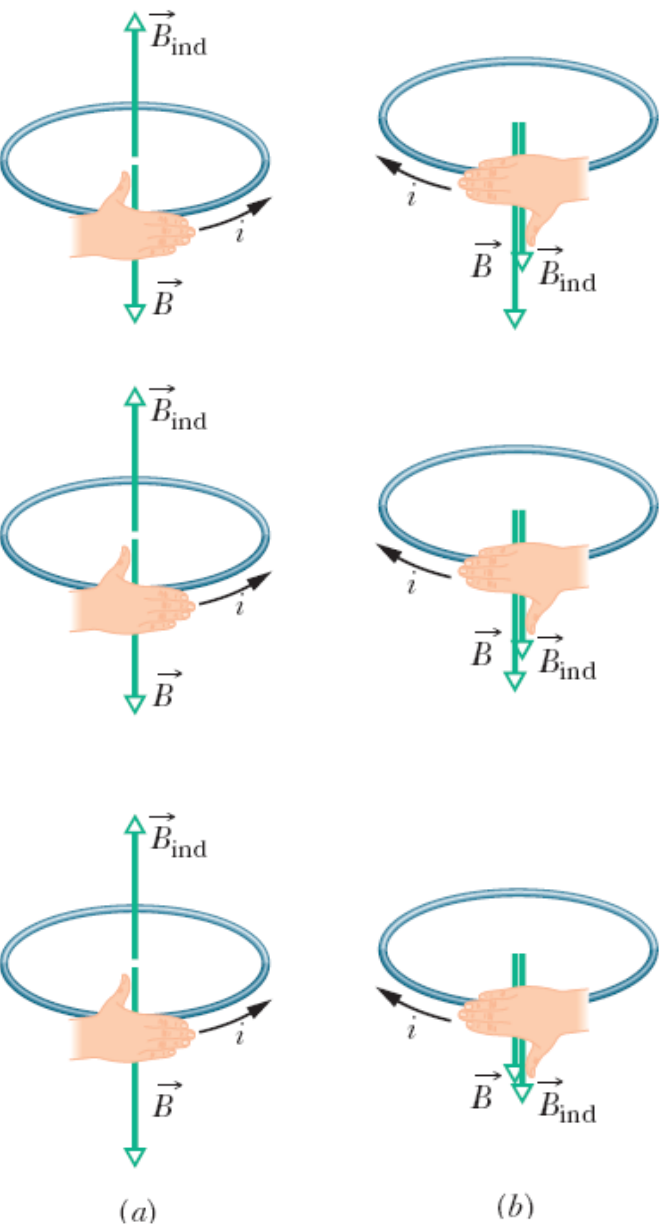

**Fig. 30-5** The direction of the current  $i$  induced in a loop is such that the current's magnetic field  $\mathbf{B}_{ind}$  opposes the change in the magnetic field inducing  $i$ . The field is always directed opposite an increasing field (a) and in the same direction (b) as a decreasing field  $B$ . The curled–straight right-hand rule gives the direction of the induced current based on the direction of the induced field.


If the north pole of a magnet nears a closed conducting loop with its magnetic field directed *downward*, the flux through the loop increases. To oppose this increase in flux, the induced current  $i$  must set up its own field  $\mathbf{B}_{ind}$  directed upward inside the loop, as shown in *Fig. 30-5a*; then the upward flux of the field  $\mathbf{B}_{ind}$  opposes the increasing downward flux of field  $B$ . The curled–straight right-hand rule then tells us that  $i$  must be counterclockwise in *Fig. 30-5a*.



## Example, Induced emf and current due to a changing uniform B field:

Figure 30-6 shows a conducting loop consisting of a half-circle of radius  $r = 0.20$  m and three straight sections. The half-circle lies in a uniform magnetic field  $\vec{B}$  that is directed out of the page; the field magnitude is given by  $B = 4.0t^2 + 2.0t + 3.0$ , with  $B$  in teslas and  $t$  in seconds. An ideal battery with emf  $\mathcal{E}_{\text{bat}} = 2.0$  V is connected to the loop. The resistance of the loop is  $2.0 \Omega$ .

(a) What are the magnitude and direction of the emf  $\mathcal{E}_{\text{ind}}$  induced around the loop by field  $\vec{B}$  at  $t = 10$  s?

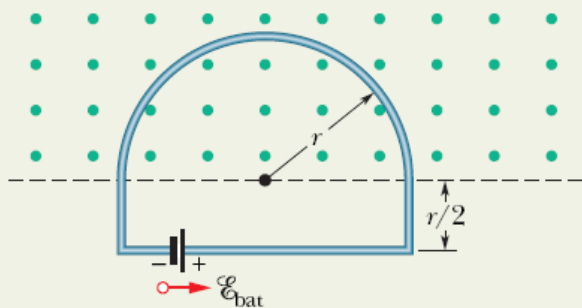

**Fig. 30-6** A battery is connected to a conducting loop that includes a half-circle of radius  $r$  lying in a uniform magnetic field. The field is directed out of the page; its magnitude is changing.

$$\mathcal{E}_{\text{ind}} = \frac{d\Phi_B}{dt} = \frac{d(BA)}{dt} = A \frac{dB}{dt}.$$

Because the flux penetrates the loop only within the half-circle, the area  $A$  in this equation is  $\frac{1}{2}\pi r^2$ . Substituting this and the given expression for  $B$  yields

$$\begin{aligned}\mathcal{E}_{\text{ind}} &= A \frac{dB}{dt} = \frac{\pi r^2}{2} \frac{d}{dt} (4.0t^2 + 2.0t + 3.0) \\ &= \frac{\pi r^2}{2} (8.0t + 2.0).\end{aligned}$$

At  $t = 10$  s, then,

$$\begin{aligned}\mathcal{E}_{\text{ind}} &= \frac{\pi (0.20 \text{ m})^2}{2} [8.0(10) + 2.0] \\ &= 5.152 \text{ V} \approx 5.2 \text{ V}.\end{aligned}\quad (\text{Answer})$$

**Direction:** To find the direction of  $\mathcal{E}_{\text{ind}}$ , we first note that in Fig. 30-6 the flux through the loop is out of the page and increasing. Because the induced field  $B_{\text{ind}}$  (due to the induced current) must oppose that increase, it must be *into* the page. Using the curled-straight right-hand rule (Fig. 30-5c), we find that the induced current is clockwise around the loop, and thus so is the induced emf  $\mathcal{E}_{\text{ind}}$ .

(b) What is the current in the loop at  $t = 10$  s?


**Calculation:** The induced emf  $\mathcal{E}_{\text{ind}}$  tends to drive a current clockwise around the loop; the battery's emf  $\mathcal{E}_{\text{bat}}$  tends to drive a current counterclockwise. Because  $\mathcal{E}_{\text{ind}}$  is greater than  $\mathcal{E}_{\text{bat}}$ , the net emf  $\mathcal{E}_{\text{net}}$  is clockwise, and thus so is the current. To find the current at  $t = 10$  s, we use Eq. 27-2 ( $i = \mathcal{E}/R$ ):

$$\begin{aligned}i &= \frac{\mathcal{E}_{\text{net}}}{R} = \frac{\mathcal{E}_{\text{ind}} - \mathcal{E}_{\text{bat}}}{R} \\ &= \frac{5.152 \text{ V} - 2.0 \text{ V}}{2.0 \Omega} = 1.58 \text{ A} \approx 1.6 \text{ A}.\end{aligned}\quad (\text{Answer})$$

## Example, Induced emf and current due to a changing nonuniform B field:

Figure 30-7 shows a rectangular loop of wire immersed in a nonuniform and varying magnetic field  $\vec{B}$  that is perpendicular to and directed into the page. The field's magnitude is given by  $B = 4t^2x^2$ , with  $B$  in teslas,  $t$  in seconds,

If the field varies with position, we must integrate to get the flux through the loop.

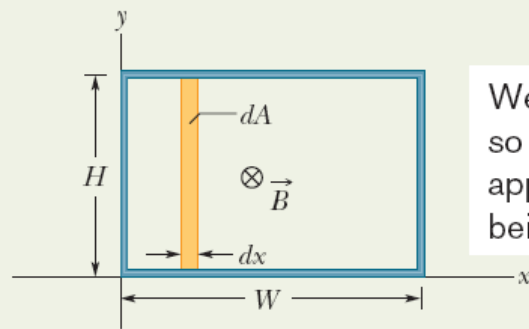

We start with a strip so thin that we can approximate the field as being uniform within it.

**Fig. 30-7** A closed conducting loop, of width  $W$  and height  $H$ , lies in a nonuniform, varying magnetic field that points directly into the page. To apply Faraday's law, we use the vertical strip of height  $H$ , width  $dx$ , and area  $dA$ .

**Calculations:** In Fig. 30-7,  $\vec{B}$  is perpendicular to the plane of the loop (and hence parallel to the differential area vector  $d\vec{A}$ ); so the dot product in Eq. 30-1 gives  $B dA$ . Because the magnetic field varies with the coordinate  $x$  but not with the coordinate  $y$ , we can take the differential area  $dA$  to be the area of a vertical strip of height  $H$  and width  $dx$  (as shown in Fig. 30-7). Then  $dA = H dx$ , and the flux through the loop is

$$\Phi_B = \int \vec{B} \cdot d\vec{A} = \int B dA = \int BH dx = \int 4t^2x^2H dx.$$

Treating  $t$  as a constant for this integration and inserting the integration limits  $x = 0$  and  $x = 3.0$  m, we obtain

$$\Phi_B = 4t^2H \int_0^{3.0} x^2 dx = 4t^2H \left[ \frac{x^3}{3} \right]_0^{3.0} = 72t^2,$$

where we have substituted  $H = 2.0$  m and  $\Phi_B$  is in webers. Now we can use Faraday's law to find the magnitude of  $\mathcal{E}$  at any time  $t$ :

$$\mathcal{E} = \frac{d\Phi_B}{dt} = \frac{d(72t^2)}{dt} = 144t,$$

in which  $\mathcal{E}$  is in volts. At  $t = 0.10$  s,

$$\mathcal{E} = (144 \text{ V/s})(0.10 \text{ s}) \approx 14 \text{ V.} \quad (\text{Answer})$$

The flux of  $\vec{B}$  through the loop is into the page in Fig. 30-7 and is increasing in magnitude because  $B$  is increasing in magnitude with time. By Lenz's law, the field  $B_{\text{ind}}$  of the induced current opposes this increase and so is directed out of the page. The curled-straight right-hand rule in Fig. 30-5a then tells us that the induced current is counterclockwise around the loop, and thus so is the induced emf  $\mathcal{E}$ .

### 30.5: Induction and Energy Transfers:

→If the loop is pulled at a constant velocity  $v$ , one must apply a constant force  $F$  to the loop since an equal and opposite magnetic force acts on the loop to oppose it. The power is  $P=Fv$ .

→As the loop is pulled, the portion of its area within the magnetic field, and therefore the magnetic flux, decrease.


According to Faraday's law, a current is produced in the loop. The magnitude of the flux through the loop is  $\Phi_B = BA = BLx$ .

→Therefore, 
$$\mathcal{E} = \frac{d\Phi_B}{dt} = \frac{d}{dt} BLx = BL \frac{dx}{dt} = BLv,$$

→The induced current is therefore 
$$i = \frac{BLv}{R}.$$


→The net deflecting force is: 
$$F = F_1 = iLB \sin 90^\circ = iLB = \frac{B^2 L^2 v}{R}.$$

→The power is therefore 
$$P = Fv = \frac{B^2 L^2 v^2}{R}$$

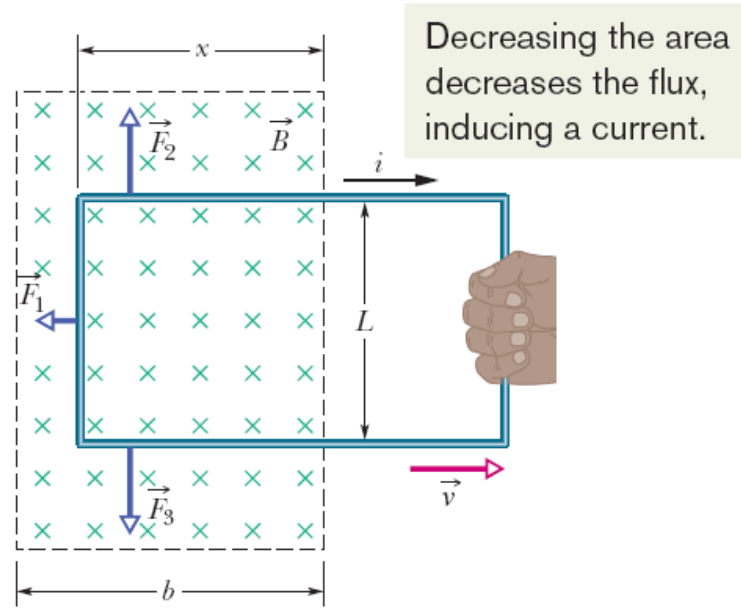

**Fig. 30-8** You pull a closed conducting loop out of a magnetic field at constant velocity  $\vec{v}$ . While the loop is moving, a clockwise current  $i$  is induced in the loop, and the loop segments still within the magnetic field experience forces  $\vec{F}_1$ ,  $\vec{F}_2$ , and  $\vec{F}_3$ .

## 30.5: Induction and Energy Transfers: Eddy Currents

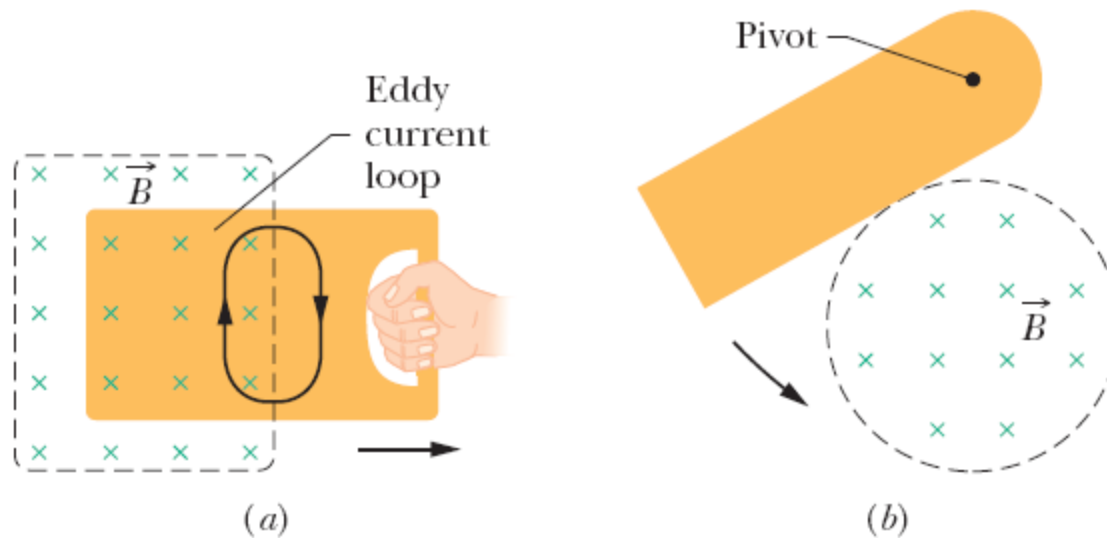


**Fig. 30-10** (a) As you pull a solid conducting plate out of a magnetic field, *eddy currents* are induced in the plate. A typical loop of eddy current is shown. (b) A conducting plate is allowed to swing like a pendulum about a pivot and into a region of magnetic field. As it enters and leaves the field, eddy currents are induced in the plate.

# 30.6: Induced Electric Field:



A changing magnetic field produces an electric field.

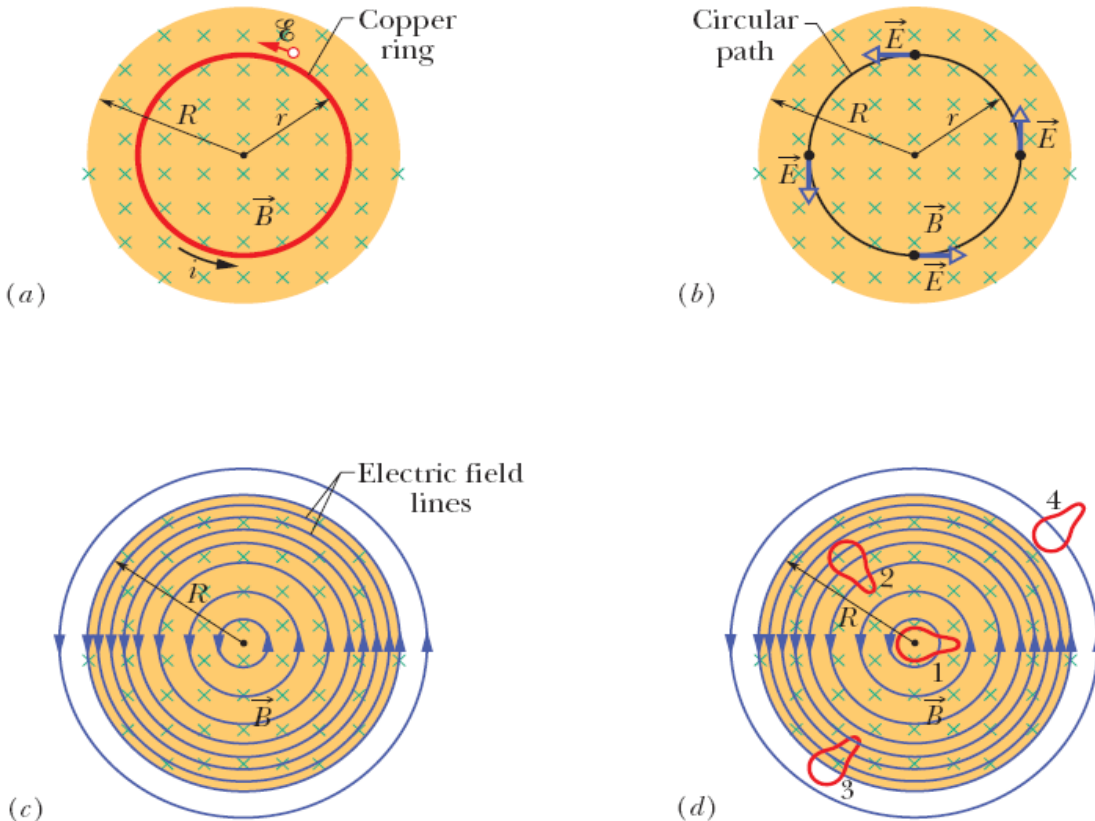

**Fig. 30-11** (a) If the magnetic field increases at a steady rate, a constant induced current appears, as shown, in the copper ring of radius  $r$ . (b) An induced electric field exists even when the ring is removed; the electric field is shown at four points. (c) The complete picture of the induced electric field, displayed as field lines. (d) Four similar closed paths that enclose identical areas. Equal emfs are induced around paths 1 and 2, which lie entirely within the region of changing magnetic field. A smaller emf is induced around path 3, which only partially lies in that region. No net emf is induced around path 4, which lies entirely outside the magnetic field.

## 30.6: Induced Electric Fields, Reformulation of Faraday's Law:

Consider a particle of charge  $q_0$  moving around the circular path. The work  $W$  done on it in one revolution by the induced electric field is  $W = \mathcal{E}q_0$ , where  $\mathcal{E}$  is the induced emf.

From another point of view, the work is

$$W = \int \vec{F} \cdot d\vec{s} = (q_0 E)(2\pi r),$$

Here where  $q_0 E$  is the magnitude of the force acting on the test charge and  $2\pi r$  is the distance over which that force acts.

$$\Rightarrow \mathcal{E} = 2\pi r E.$$

In general, 
$$W = \oint \vec{F} \cdot d\vec{s} = q_0 \oint \vec{E} \cdot d\vec{s} \quad \Rightarrow \quad \mathcal{E} = \oint \vec{E} \cdot d\vec{s}.$$

$$\Rightarrow \oint \vec{E} \cdot d\vec{s} = - \frac{d\Phi_B}{dt} \quad (\text{Faraday's law}).$$

## 30.6: Induced Electric Fields, A New Look at Electric Potential:



Electric potential has meaning only for electric fields that are produced by static charges; it has no meaning for electric fields that are produced by induction.

When a changing magnetic flux is present, the integral  $\oint \vec{E} \cdot d\vec{s}$  is not zero but is  $d\Phi_B/dt$ .

Thus, assigning electric potential to an induced electric field leads us to conclude that electric potential has no meaning for electric fields associated with induction.



## Example, Induced electric field from changing magnetic field:

In Fig. 30-11*b*, take  $R = 8.5$  cm and  $dB/dt = 0.13$  T/s.

(a) Find an expression for the magnitude  $E$  of the induced electric field at points within the magnetic field, at radius  $r$  from the center of the magnetic field. Evaluate the expression for  $r = 5.2$  cm.

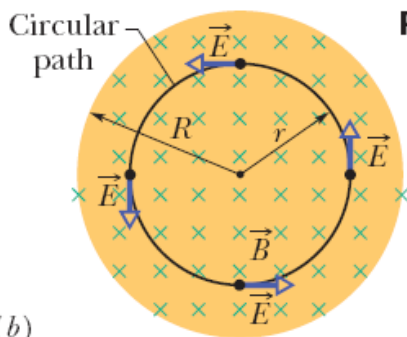


Fig. 30-11

(*b*)

**Calculations:** To calculate the field magnitude  $E$ , we apply Faraday's law in the form of Eq. 30-20. We use a circular path of integration with radius  $r \leq R$  because we want  $E$  for points within the magnetic field. We assume from the symmetry that  $\vec{E}$  in Fig. 30-11*b* is tangent to the circular path at all points. The path vector  $d\vec{s}$  is also always tangent to the circular path; so the dot product  $\vec{E} \cdot d\vec{s}$  in Eq. 30-20 must have the magnitude  $E ds$  at all points on the path. We can also assume from the symmetry that  $E$  has the same value at all points along the circular path. Then the left side of Eq. 30-20 becomes

$$\oint \vec{E} \cdot d\vec{s} = \oint E ds = E \oint ds = E(2\pi r). \quad (30-23)$$

(The integral  $\oint ds$  is the circumference  $2\pi r$  of the circular path.)

$$\Phi_B = BA = B(\pi r^2). \quad (30-24)$$

Substituting this and Eq. 30-23 into Eq. 30-20 and dropping the minus sign, we find that

$$E(2\pi r) = (\pi r^2) \frac{dB}{dt}$$

or

$$E = \frac{r}{2} \frac{dB}{dt}. \quad (\text{Answer}) \quad (30-25)$$

Equation 30-25 gives the magnitude of the electric field at any point for which  $r \leq R$  (that is, within the magnetic field). Substituting given values yields, for the magnitude of  $\vec{E}$  at  $r = 5.2$  cm,

$$\begin{aligned} E &= \frac{(5.2 \times 10^{-2} \text{ m})}{2} (0.13 \text{ T/s}) \\ &= 0.0034 \text{ V/m} = 3.4 \text{ mV/m}. \quad (\text{Answer}) \end{aligned}$$

## Example, Induced electric field from changing magnetic field, cont.:

(b) Find an expression for the magnitude  $E$  of the induced electric field at points that are outside the magnetic field, at radius  $r$  from the center of the magnetic field. Evaluate the expression for  $r = 12.5$  cm.

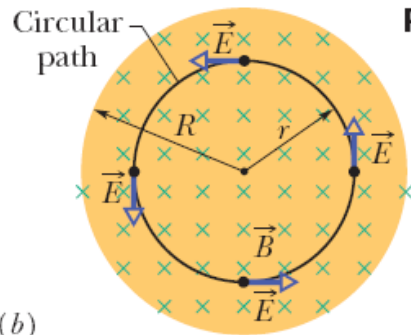


Fig. 30-11

(b)

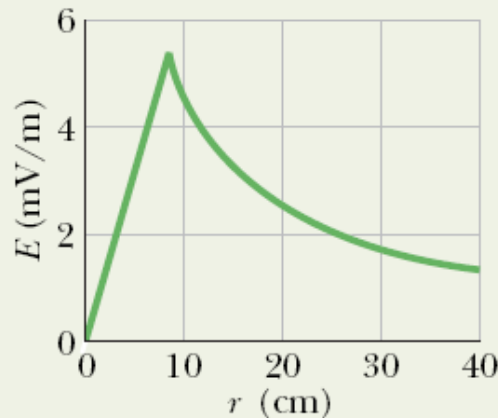


Fig. 30-12 A plot of the induced electric field  $E(r)$ .

**Calculations:** We can now write

$$\Phi_B = BA = B(\pi R^2). \quad (30-26)$$

Substituting this and Eq. 30-23 into Eq. 30-20 (without the minus sign) and solving for  $E$  yield

$$E = \frac{R^2}{2r} \frac{dB}{dt}. \quad (\text{Answer}) \quad (30-27)$$


Because  $E$  is not zero here, we know that an electric field is induced even at points that are outside the changing magnetic field, an important result that (as you will see in Section 31-11) makes transformers possible.

With the given data, Eq. 30-27 yields the magnitude of  $\vec{E}$  at  $r = 12.5$  cm:

$$\begin{aligned} E &= \frac{(8.5 \times 10^{-2} \text{ m})^2}{(2)(12.5 \times 10^{-2} \text{ m})} (0.13 \text{ T/s}) \\ &= 3.8 \times 10^{-3} \text{ V/m} = 3.8 \text{ mV/m}. \quad (\text{Answer}) \end{aligned}$$

Equations 30-25 and 30-27 give the same result for  $r = R$ . Figure 30-12 shows a plot of  $E(r)$ . Note that the inside and outside plots meet at  $r = R$ .

## 30.7: Inductors and Inductance:

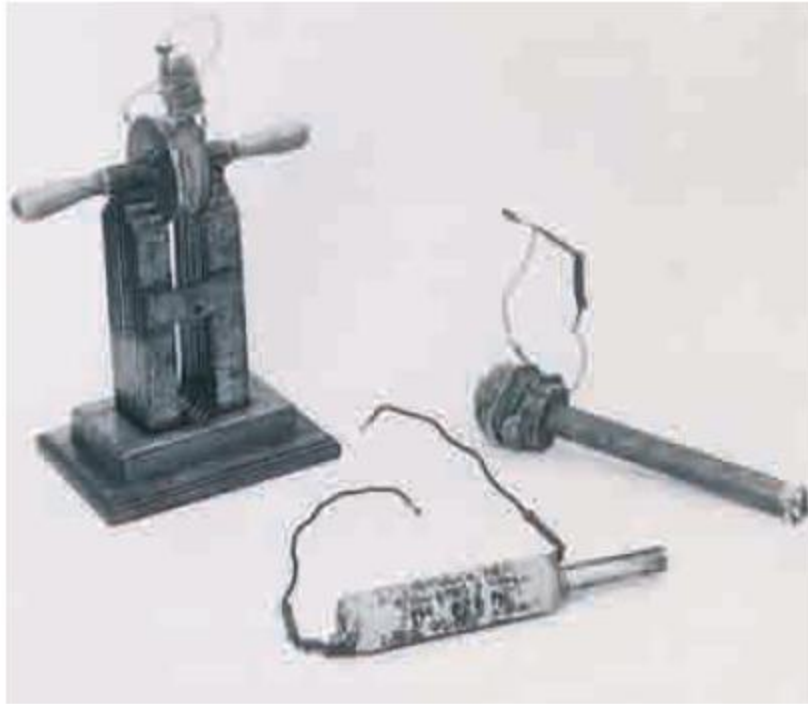

The crude inductors with which Michael Faraday discovered the law of induction. In those days amenities such as insulated wire were not commercially available. It is said that Faraday insulated his wires by wrapping them with strips cut from one of his wife's petticoats. (*The Royal Institution/Bridgeman Art Library/NY*)

An **inductor** (symbol  $\text{Ⓛ}$ ) can be used to produce a desired magnetic field.

If we establish a current  $i$  in the windings (turns) of the solenoid which can be treated as our inductor, the current produces a magnetic flux  $\Phi_B$  through the central region of the inductor.

The inductance of the inductor is then

$$L = \frac{N\Phi_B}{i} \quad (\text{inductance defined})$$

The SI unit of inductance is the tesla-square meter per ampere ( $\text{T m}^2/\text{A}$ ). We call this the henry (H), after American physicist Joseph Henry,

### 30.7: Inductance of a Solenoid:

Consider a long solenoid of cross-sectional area  $A$ , with number of turns  $N$ , and of length  $l$ . The flux is  $N\Phi_B = (nl)(BA)$ ,

Here  $n$  is the number of turns per unit length.

The magnitude of  $B$  is given by:

$$B = \mu_0 in,$$

Therefore,

$$L = \frac{N\Phi_B}{i} = \frac{(nl)(BA)}{i} = \frac{(nl)(\mu_0 in)(A)}{i}$$
$$= \mu_0 n^2 l A.$$

The inductance per unit length near the center is therefore:

$$\frac{L}{l} = \mu_0 n^2 A \quad (\text{solenoid}).$$

Here,


$$\begin{aligned} \mu_0 &= 4\pi \times 10^{-7} \text{ T}\cdot\text{m/A} \\ &= 4\pi \times 10^{-7} \text{ H/m}. \end{aligned}$$

## 30.8: Self-Induction:



An induced emf  $\mathcal{E}_L$  appears in any coil in which the current is changing.

This process (see Fig. 30-13) is called **self-induction**, and the emf that appears is called a **self-induced emf**. It obeys Faraday's law of induction just as other induced emfs do.

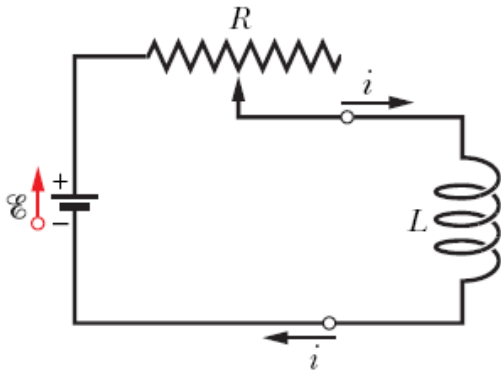

**Fig. 30-13** If the current in a coil is changed by varying the contact position on a variable resistor, a self-induced emf  $\mathcal{E}_L$  will appear in the coil *while the current is changing*.

$$N\Phi_B = Li.$$


$$\mathcal{E}_L = -\frac{d(N\Phi_B)}{dt}.$$

$$\mathcal{E}_L = -L \frac{di}{dt} \quad (\text{self-induced emf}).$$

## 30.9: *RL* Circuits:



Initially, an inductor acts to oppose changes in the current through it. A long time later, it acts like ordinary connecting wire.

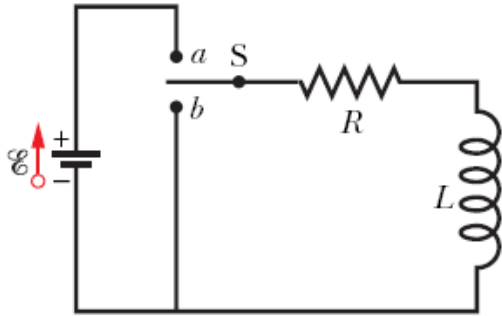

**Fig. 30-15** An *RL* circuit. When switch *S* is closed on *a*, the current rises and approaches a limiting value  $\mathcal{E}/R$ .

$$i = \frac{\mathcal{E}}{R} (1 - e^{-Rt/L}),$$

$$i = \frac{\mathcal{E}}{R} (1 - e^{-t/\tau_L}) \quad (\text{rise of current}).$$


$$\tau_L = \frac{L}{R} \quad (\text{time constant}).$$

If we suddenly remove the emf from this same circuit, the charge does not immediately fall to zero but approaches zero in an exponential fashion:


$$i = \frac{\mathcal{E}}{R} e^{-t/\tau_L} = i_0 e^{-t/\tau_L} \quad (\text{decay of current}).$$

# 30.9: RL Circuits:

The resistor's potential difference turns on.  
The inductor's potential difference turns off.

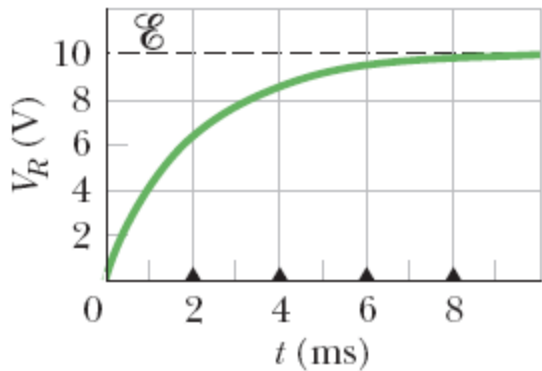

(a)

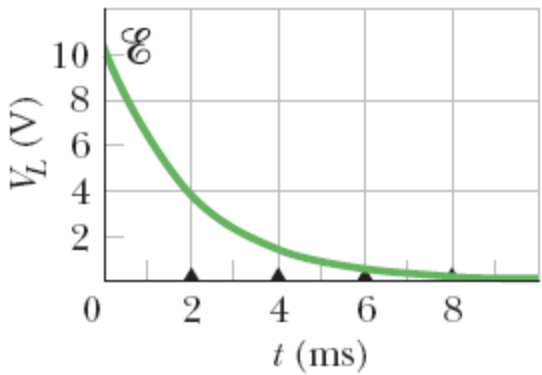

(b)

**Fig. 30-17** The variation with time of (a)  $V_R$ , the potential difference across the resistor in the circuit of Fig. 30-16, and (b)  $V_L$ , the potential difference across the inductor in that circuit. The small triangles represent successive intervals of one inductive time constant  $\tau_L = L/R$ . The figure is plotted for  $R = 2000 \Omega$ ,  $L = 4.0$  H, and  $\mathcal{E} = 10$  V.



## Example, RL circuit, immediately after switching and after a long time:

Figure 30-18a shows a circuit that contains three identical resistors with resistance  $R = 9.0 \Omega$ , two identical inductors with inductance  $L = 2.0 \text{ mH}$ , and an ideal battery with emf  $\mathcal{E} = 18 \text{ V}$ .

(a) What is the current  $i$  through the battery just after the switch is closed?

### KEY IDEA

Just after the switch is closed, the inductor acts to oppose a change in the current through it.

**Calculations:** Because the current through each inductor is zero before the switch is closed, it will also be zero just afterward. Thus, immediately after the switch is closed, the inductors act as broken wires, as indicated in Fig. 30-18b. We then have a single-loop circuit for which the loop rule gives us

$$\mathcal{E} - iR = 0.$$


Substituting given data, we find that

$$i = \frac{\mathcal{E}}{R} = \frac{18 \text{ V}}{9.0 \Omega} = 2.0 \text{ A.} \quad (\text{Answer})$$

(b) What is the current  $i$  through the battery long after the switch has been closed?

### KEY IDEA

Long after the switch has been closed, the currents in the circuit have reached their equilibrium values, and the inductors act as simple connecting wires, as indicated in Fig. 30-18c.

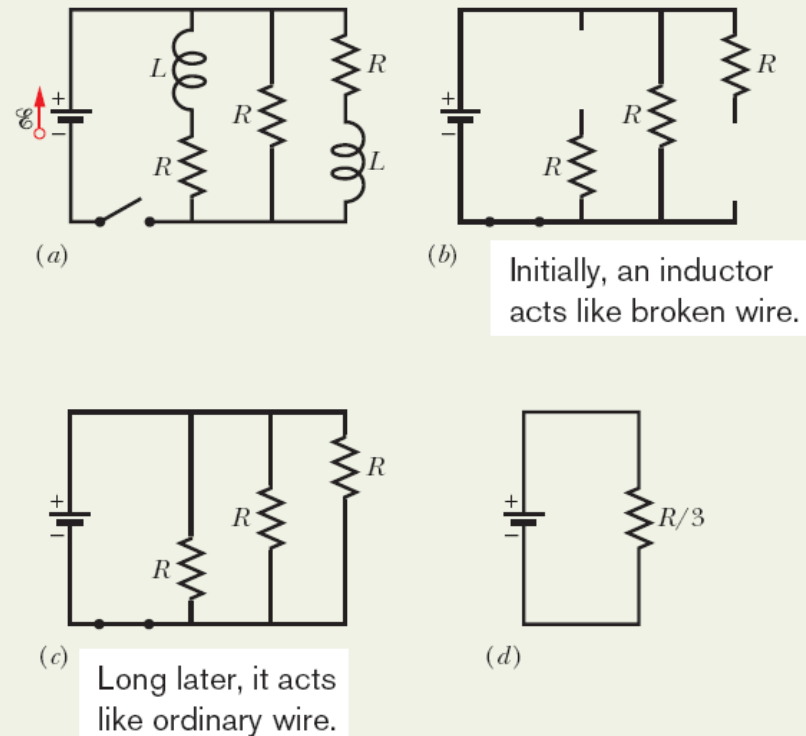

**Fig. 30-18** (a) A multiloop  $RL$  circuit with an open switch. (b) The equivalent circuit just after the switch has been closed. (c) The equivalent circuit a long time later. (d) The single-loop circuit that is equivalent to circuit (c).

**Calculations:** We now have a circuit with three identical resistors in parallel; from Eq. 27-23, their equivalent resistance is  $R_{\text{eq}} = R/3 = (9.0 \Omega)/3 = 3.0 \Omega$ . The equivalent circuit shown in Fig. 30-18d then yields the loop equation  $\mathcal{E} - iR_{\text{eq}} = 0$ , or

$$i = \frac{\mathcal{E}}{R_{\text{eq}}} = \frac{18 \text{ V}}{3.0 \Omega} = 6.0 \text{ A.} \quad (\text{Answer})$$

## Example, RL circuit, during a transition:

A solenoid has an inductance of 53 mH and a resistance of 0.37  $\Omega$ . If the solenoid is connected to a battery, how long will the current take to reach half its final equilibrium value? (This is a *real solenoid* because we are considering its small, but nonzero, internal resistance.)

### KEY IDEA

We can mentally separate the solenoid into a resistance and an inductance that are wired in series with a battery, as in Fig. 30-16. Then application of the loop rule leads to Eq. 30-39, which has the solution of Eq. 30-41 for the current  $i$  in the circuit.


**Calculations:** According to that solution, current  $i$  increases exponentially from zero to its final equilibrium value of  $\mathcal{E}/R$ . Let  $t_0$  be the time that current  $i$  takes to reach half its equilibrium value. Then Eq. 30-41 gives us

$$\frac{1}{2} \frac{\mathcal{E}}{R} = \frac{\mathcal{E}}{R} (1 - e^{-t_0/\tau_L}).$$

We solve for  $t_0$  by canceling  $\mathcal{E}/R$ , isolating the exponential, and taking the natural logarithm of each side. We find

$$\begin{aligned} t_0 &= \tau_L \ln 2 = \frac{L}{R} \ln 2 = \frac{53 \times 10^{-3} \text{ H}}{0.37 \Omega} \ln 2 \\ &= 0.10 \text{ s.} \end{aligned} \quad (\text{Answer})$$

### 30.10: Energy Stored in a Magnetic Field:

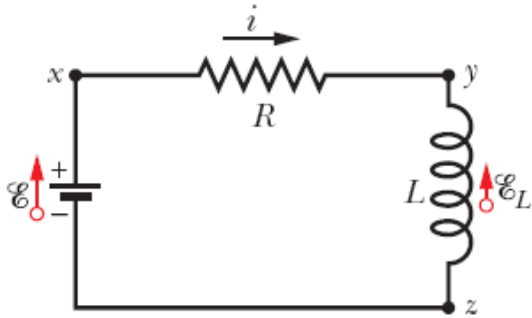

**Fig. 30-16** The circuit of Fig. 30-15 with the switch closed on  $a$ . We apply the loop rule for the circuit clockwise, starting at  $x$ .

$$\mathcal{E} = L \frac{di}{dt} + iR,$$

$$\mathcal{E}i = Li \frac{di}{dt} + i^2R,$$

$$\frac{dU_B}{dt} = Li \frac{di}{dt}.$$

This is the rate at which magnetic potential energy  $U_B$  is stored in the magnetic field.

$$\int_0^{U_B} dU_B = \int_0^i Li \, di$$

$$U_B = \frac{1}{2} Li^2 \quad (\text{magnetic energy}),$$

This represents the total energy stored by an inductor  $L$  carrying a current  $i$ .

## Example, Energy stored in a magnetic field:

A coil has an inductance of 53 mH and a resistance of  $0.35 \Omega$ .

(a) If a 12 V emf is applied across the coil, how much energy is stored in the magnetic field after the current has built up to its equilibrium value?

### KEY IDEA

The energy stored in the magnetic field of a coil at any time depends on the current through the coil at that time, according to Eq. 30-49 ( $U_B = \frac{1}{2}Li^2$ ).

**Calculations:** Thus, to find the energy  $U_{B\infty}$  stored at equilibrium, we must first find the equilibrium current. From Eq. 30-41, the equilibrium current is

$$i_{\infty} = \frac{\mathcal{E}}{R} = \frac{12 \text{ V}}{0.35 \Omega} = 34.3 \text{ A.} \quad (30-51)$$

Then substitution yields

$$\begin{aligned} U_{B\infty} &= \frac{1}{2}Li_{\infty}^2 = \left(\frac{1}{2}\right)(53 \times 10^{-3} \text{ H})(34.3 \text{ A})^2 \\ &= 31 \text{ J.} \end{aligned} \quad (\text{Answer})$$

(b) After how many time constants will half this equilibrium energy be stored in the magnetic field?

**Calculations:** Now we are being asked: At what time  $t$  will the relation

$$U_B = \frac{1}{2}U_{B\infty}$$

be satisfied? Using Eq. 30-49 twice allows us to rewrite this energy condition as

$$\begin{aligned} \frac{1}{2}Li^2 &= \left(\frac{1}{2}\right)\frac{1}{2}Li_{\infty}^2 \\ \text{or} \quad i &= \left(\frac{1}{\sqrt{2}}\right)i_{\infty}. \end{aligned} \quad (30-52)$$

This equation tells us that, as the current increases from its initial value of 0 to its final value of  $i_{\infty}$ , the magnetic field will have half its final stored energy when the current has increased to this value. In general, we know that  $i$  is given by Eq. 30-41, and here  $i_{\infty}$  (see Eq. 30-51) is  $\mathcal{E}/R$ ; so Eq. 30-52 becomes

$$\frac{\mathcal{E}}{R}(1 - e^{-t/\tau_L}) = \frac{\mathcal{E}}{\sqrt{2}R}.$$

By canceling  $\mathcal{E}/R$  and rearranging, we can write this as

$$e^{-t/\tau_L} = 1 - \frac{1}{\sqrt{2}} = 0.293,$$

which yields

$$\frac{t}{\tau_L} = -\ln 0.293 = 1.23$$

or  $t \approx 1.2\tau_L$ . (Answer)

Thus, the energy stored in the magnetic field of the coil by the current will reach half its equilibrium value 1.2 time constants after the emf is applied.

### 30.11: Energy Density of a Magnetic Field:

Consider a length  $l$  near the middle of a long solenoid of cross-sectional area  $A$  carrying current  $i$ ; the volume associated with this length is  $Al$ .

The energy  $U_B$  stored by the length  $l$  of the solenoid must lie entirely within this volume because the magnetic field outside such a solenoid is approximately zero. Also, the stored energy must be uniformly distributed within the solenoid because the magnetic field is (approximately) uniform everywhere inside.

Thus, the energy stored per unit volume of the field is

$$u_B = \frac{U_B}{Al}$$


$$U_B = \frac{1}{2}Li^2,$$

$$u_B = \frac{Li^2}{2Al} = \frac{L}{l} \frac{i^2}{2A} = \frac{1}{2}\mu_0 n^2 i^2,$$

$$u_B = \frac{B^2}{2\mu_0} \quad (\text{magnetic energy density}).$$

# 30.12: Mutual Induction:

**Fig. 30-19** Mutual induction. (a) The magnetic field  $\vec{B}_1$  produced by current  $i_1$  in coil 1 extends through coil 2. If  $i_1$  is varied (by varying resistance  $R$ ), an emf is induced in coil 2 and current registers on the meter connected to coil 2. (b) The roles of the coils interchanged.

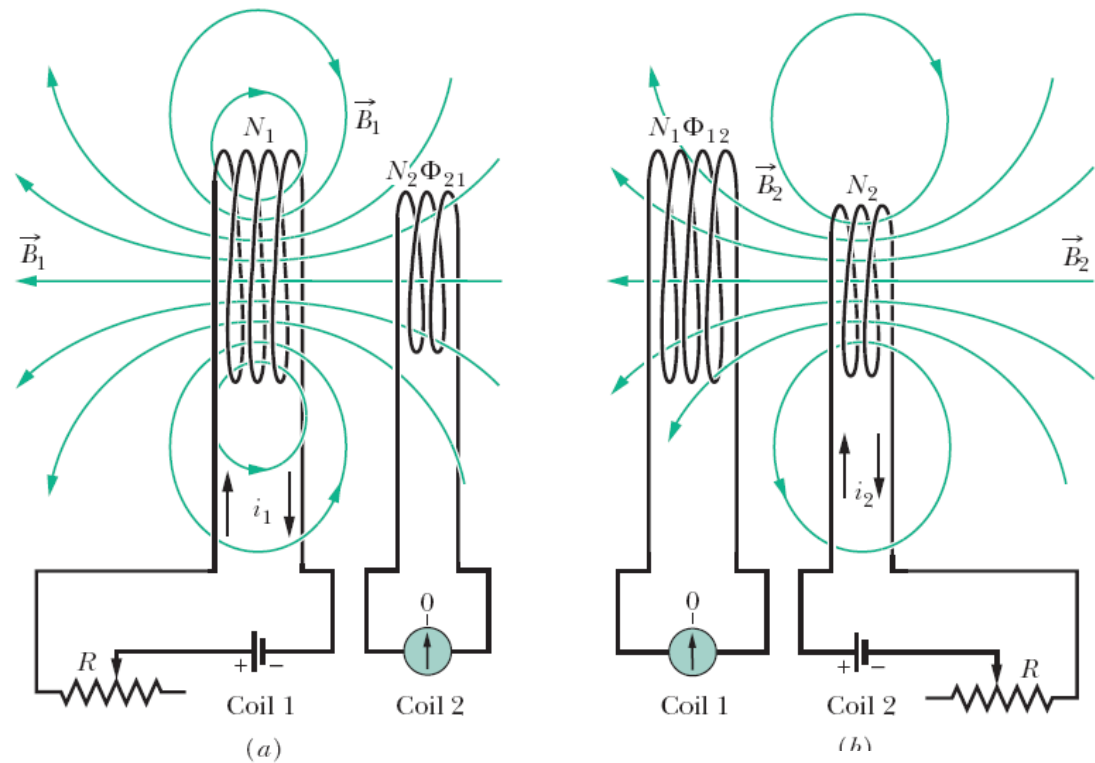

The mutual inductance  $M_{21}$  of coil 2 with respect to coil 1 is defined as  $M_{21} = \frac{N_2 \Phi_{21}}{i_1}$ ,

$$M_{21} \frac{di_1}{dt} = N_2 \frac{d\Phi_{21}}{dt}.$$

The right side of this equation is, according to Faraday's law, just the magnitude of the emf  $\mathcal{E}_2$  appearing in coil 2 due to the changing current in coil 1.

$$\mathcal{E}_2 = -M_{21} \frac{di_1}{dt}$$


Similarly,  $\mathcal{E}_1 = -M_{12} \frac{di_2}{dt}$ .

➔  $M_{21} = M_{12} = M,$

## Example, Mutual Inductance Between Two Parallel Coils:

Figure 30-20 shows two circular close-packed coils, the smaller (radius  $R_2$ , with  $N_2$  turns) being coaxial with the larger (radius  $R_1$ , with  $N_1$  turns) and in the same plane.

(a) Derive an expression for the mutual inductance  $M$  for this arrangement of these two coils, assuming that  $R_1 \gg R_2$ .

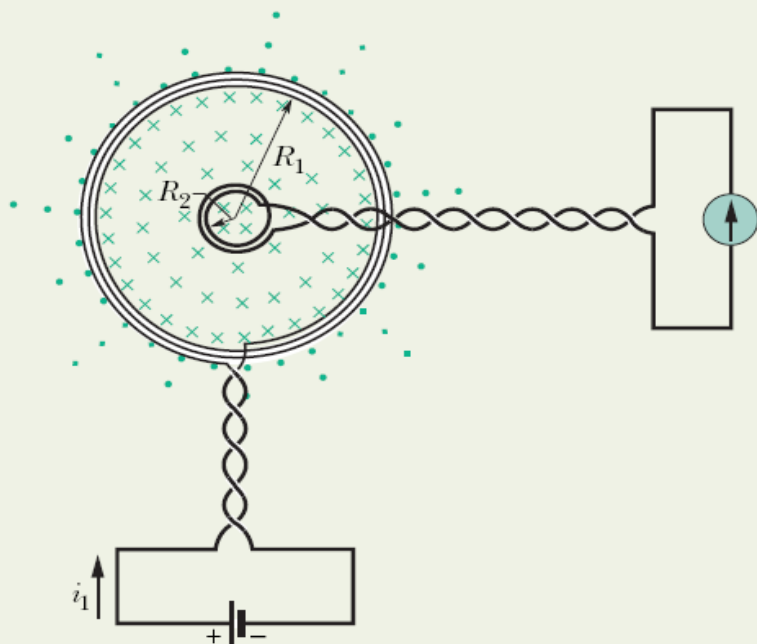

**Fig. 30-20** A small coil is located at the center of a large coil. The mutual inductance of the coils can be determined by sending current  $i_1$  through the large coil.

$$M = \frac{N_2 \Phi_{21}}{i_1}. \quad (30-66)$$

The flux  $\Phi_{21}$  through each turn of the smaller coil is, from Eq. 30-2,

$$\Phi_{21} = B_1 A_2,$$

where  $B_1$  is the magnitude of the magnetic field at points within the small coil due to the larger coil and  $A_2 (= \pi R_2^2)$  is the area enclosed by the turn. Thus, the flux linkage in the smaller coil (with its  $N_2$  turns) is

$$N_2 \Phi_{21} = N_2 B_1 A_2. \quad (30-67)$$

To find  $B_1$  at points within the smaller coil, we can use Eq. 29-26,

$$B(z) = \frac{\mu_0 i R^2}{2(R^2 + z^2)^{3/2}},$$

with  $z$  set to 0 because the smaller coil is in the plane of the larger coil. That equation tells us that each turn of the larger coil produces a magnetic field of magnitude  $\mu_0 i_1 / 2R_1$  at points within the smaller coil. Thus, the larger coil (with its  $N_1$  turns) produces a total magnetic field of magnitude

$$B_1 = N_1 \frac{\mu_0 i_1}{2R_1} \quad (30-68)$$

at points within the smaller coil.

Substituting Eq. 30-68 for  $B_1$  and  $\pi R_2^2$  for  $A_2$  in Eq. 30-67 yields


$$N_2 \Phi_{21} = \frac{\pi \mu_0 N_1 N_2 R_2^2 i_1}{2R_1}.$$

Substituting this result into Eq. 30-66, we find

$$M = \frac{N_2 \Phi_{21}}{i_1} = \frac{\pi \mu_0 N_1 N_2 R_2^2}{2R_1}. \quad (\text{Answer}) \quad (30-69)$$



## Example, Mutual Inductance Between Two Parallel Coils, cont.:

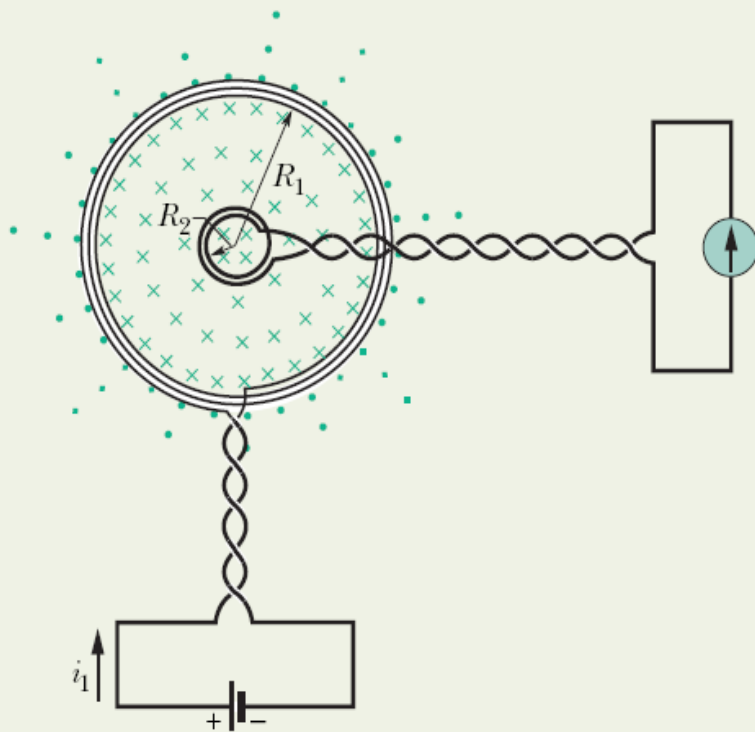

**Fig. 30-20** A small coil is located at the center of a large coil. The mutual inductance of the coils can be determined by sending current  $i_1$  through the large coil.

(b) What is the value of  $M$  for  $N_1 = N_2 = 1200$  turns,  $R_2 = 1.1$  cm, and  $R_1 = 15$  cm?

**Calculations:** Equation 30-69 yields

$$M = \frac{(\pi)(4\pi \times 10^{-7} \text{ H/m})(1200)(1200)(0.011 \text{ m})^2}{(2)(0.15 \text{ m})}$$
$$= 2.29 \times 10^{-3} \text{ H} \approx 2.3 \text{ mH.} \quad (\text{Answer})$$

Consider the situation if we reverse the roles of the two coils—that is, if we produce a current  $i_2$  in the smaller coil and try to calculate  $M$  from Eq. 30-57 in the form

$$M = \frac{N_1 \Phi_{12}}{i_2}.$$

The calculation of  $\Phi_{12}$  (the nonuniform flux of the smaller coil's magnetic field encompassed by the larger coil) is not simple. If we were to do the calculation numerically using a computer, we would find  $M$  to be 2.3 mH, as above! This emphasizes that Eq. 30-63 ( $M_{21} = M_{12} = M$ ) is not obvious.